

TECHNICAL DATA

TRANSCEIVER:

Operating Voltage:
120 VAC

Power consumption:
1 VA/Transceiver

Output:
Relay SPDT 3 amp @ 240 VAC

Ambient operating temperature:
-15 to +130F (-25 to +55C)

Storage temperature:
-15 to +155F (-25 TO +70C)

RoHS Compliant

FLOAT:

Housing material:
Polypropylene

Cable:
Polyurethane over dual
plastic fibers (.31" O.D)

Standard cable lengths:
15', 25', 50, 75'

Ambient liquid operating temperature:
+32 to +130F (0 to +55C)

**Ambient air standby
operating temperature:**
-15 to +155F (-25 to +70C)

Storage temperature:
-15 to +155F (-25 TO +70C)

Operating Wavelength:
400 to 1200 nm

OPTI-FLOAT[®] MINI




WARNING:




IF YOUR LIQUID LEVEL IS CRITICAL TO LIFE, HEALTH,
OR PROPERTY, USE A REDUNDANT LEVEL DEVICE
WITH A REDUNDANT POWER SOURCE

QUICK START INSTALLATION GUIDE

COMPONENTS

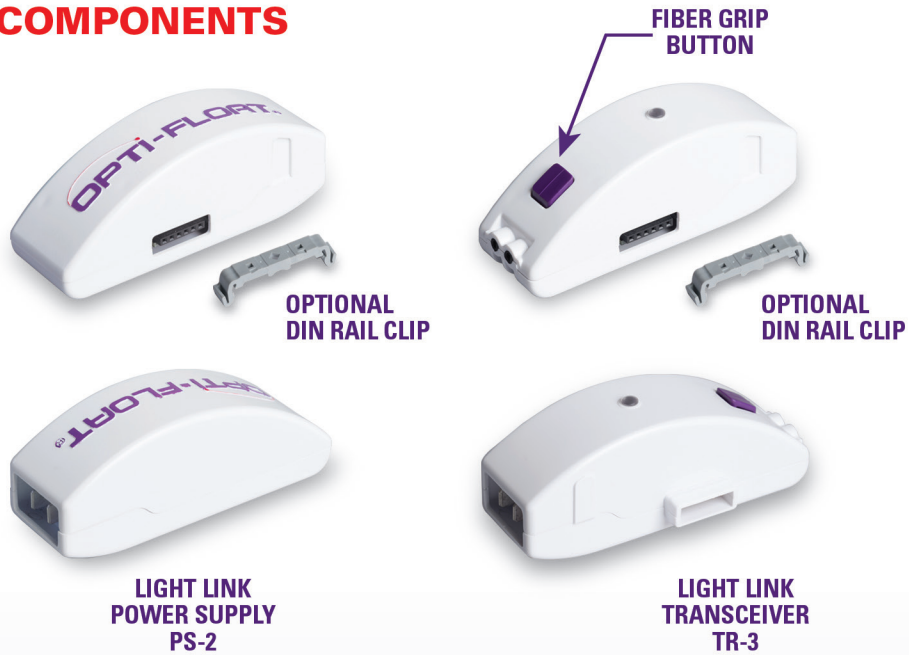

1 WIRE CONNECTIONS

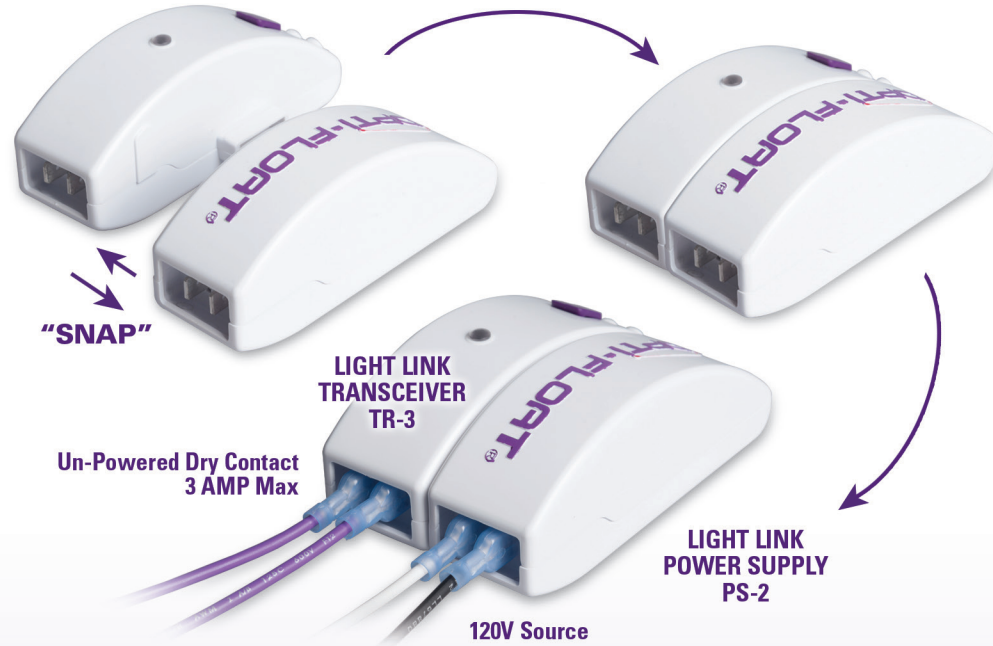

2 INSERT FLOAT FIBER



3 RETROFIT EXISTING PANEL

